



BONA WOOD FLOOR REFRESHER

Bona Wood Floor Refresher is a ready to use water-based maintenance coating specifically designed for polyurethane coated timber floors in domestic situations. It revives a dull surface giving a newly finished look and continuing protection against wear.

- Specifically designed for finished timber floors
- Based on polyurethane – superb protective qualities
- Contains no waxes
- Meets EN 14904:2006 for slip resistance

Technical data

Binding agent:	Polyurethane
Dilution:	Do not dilute
Drying time:	Approx. 2 hours* <i>* under normal climate conditions, 20°C / 60% R.H. with reasonable ventilation</i>
Application tool:	Bona Microfibre Applicator pad
Coverage:	Ca. 30 – 50m ² / Lt per coat
Safety:	Unclassified
Shelf life:	At least 2 years, from the date of production, in unopened original container
Storage / transport:	The temperature must not fall below +5°C or exceed +25°C during storage and transport.
Disposal:	Wastes and emptied containers should be handled in accordance with local regulations.
Pack size:	1 Lt
Certification	GREENGUARD

Preparation

Do not use on oiled floors or floors treated with polish or wax. If in doubt coat a small trial area. Do not use Refresher on matt floor surfaces.

Remove loose dust/grit etc. using a vacuum cleaner, scissor mop or other dry cleaning method. Clean the floor thoroughly using Bona Wood Floor Cleaner and allow to dry. Dirt, etc. dirt left on the surface of the floor will become 'encased' below the Refresher application.


Application

1. Gently agitate the contents by turning the container several times before opening. Apply Refresher with the Bona Microfibre applicator pad. Prepare the applicator pad by lightly dampening with water.
2. Apply a wavy line of Refresher on the floor; approx. 3 – 5 cm wide. Use a Bona Applicator Pad to spread a thin consistent coat evenly across a small section, approx. 3 m². Control environmental conditions to reduce airborne dust and airflow.

Even out the coat with the grain of the wood. Continue until the entire floor has been coated taking care to keep a wet edge at all times. Take particular care to observe the coverage rate.

Bona[®]

Phone 1300 882 806

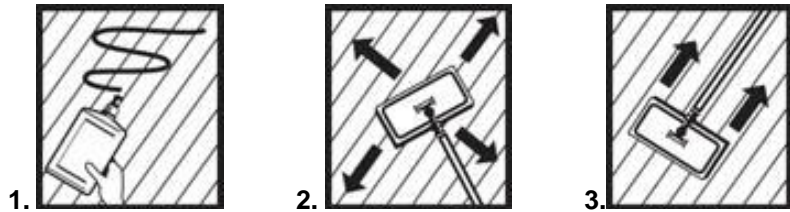

-
-
3. Allow Refresher at least 2 hours to dry before walking on the floor. If the appearance is uneven in sheen or minor streaking is evident a second coat may be applied after this time. Avoid heavy traffic and replacing furniture for 24 hours.

Additional advice

Be aware of the conditions in the rooms being coated. A hot floor, direct sunlight, wind under a door, etc. will cause Bona Refresher to dry too quickly and application marks will be seen.

Coat the entire floor. Do not use a cloth and just wiped over areas as if you 'spot' apply the differences in sheen will usually be easily seen. Similarly, uneven application can be noted with differences in sheen evident.

Maintenance

Wet cleaning of the floor can be resumed after one week. Clean the floor with Bona Wood Floor Cleaner and a microfibre pad.

Apply additional coats of Refresher as required to keep the floor in a good condition. Floors with greater amounts of wear or deep scratches should be overcoated using a Bona Traffic HD or Traffic variant.

Bona refresher contains no wax or other materials that may affect the adhesion of polyurethane finishes. Information regarding overcoating can be found on the finish product datasheet and the **Overcoating Instructions** datasheet.

Please note that whilst Bona maintenance finishes are designed to provide a sealed surface that is resistant to wear, scuffing and spillage, etc. no surface applied finish system can prevent physical damage to the timber or 'harden' the floor. Indentations in the wood and scratches may be caused by furniture, dropped items, dog claws, etc. and steps should be taken to reduce the possibility of this occurring.

Important issues

The information provided is prepared to the best of our current knowledge and makes no claim to be complete. The User is responsible for establishing that the product and recommendations herein are fit for the designated purpose, wood type and present situation before use. Bona can only guarantee the delivered product. A professional and thereby successful application of the product is beyond our control. If in doubt make a preliminary test. The User is required to read and understand all information contained on package labels and safety data sheets before using this product.

Bona[®]

Phone 1300 882 806