
# Non-toxic Floor Finishes Guide

Hard-wearing Water-based Timber Finishes for Professional Use







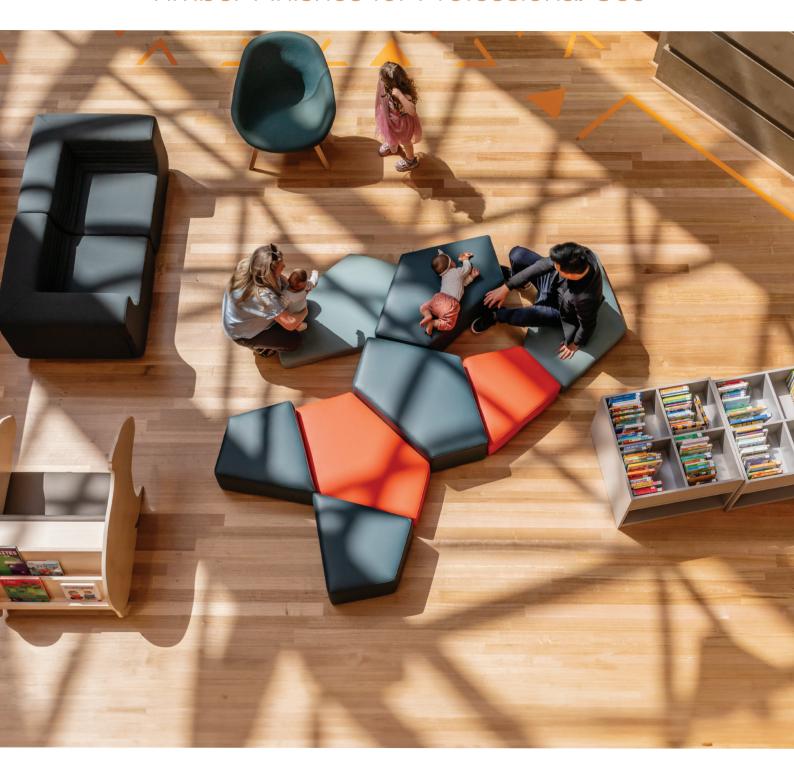











# The World's Best Non-Toxic Floor Finishes

As a flooring industry professional, the success of your business depends on satisfied clients and word of mouth recommendations. Every project or installation needs to be completed to the highest standards to ensure the profitability and ongoing success of your business.

Whichever Bona finishing solution you choose, you are guaranteed an outstanding result. The development of Bona non-toxic water-based finish systems over many vears has resulted in unmatched wear resistance and durability. Choosing Bona means you will be providing world-leading environmentally responsible non-toxic products for your customers.

Bona is recognised as the world leader in the production of water-based non-toxic finishes for timber floors, having launched its first range of water-based coatings in 1979. Since then, Bona has been constantly researching and developing their water-based finishes range.

Bona finishing products are produced in Malmö, Sweden with distribution to more than 90 countries across the world. Bona finishes have been used to coat more than 1 billion square metres of flooring, making Bona the world's biggest selling range of non-toxic water-based floor finishes.

In Australia, Bona finishes are the market leader and have been available for more than 30 years. Bona Australia provides expert technical advice and product support for architects, industry specifiers, contractors and homeowners.

The Bona finishes range includes four primers and six top coats and in addition to these water-based polyurethane products Bona also provides a range of oils and decking systems. Simply choose the combination that best suits the project and the needs of your client.

Product data sheets and safety data sheets for all Bona products can be found at bona.com.au

# Protect your Family's Health with a Non-toxic Finish

All Bona floor finishes are non-toxic water-based coatings. Bona reduced the impact on the environment by moving from solvent-based to water-based finishes in 1979. Ongoing research and development has seen Bona become a world leader in water-based coatings for timber floors.

The major difference between toxic solvent-based coatings and non-toxic water-based coatings is the amount of Volatile Organic Compounds (VOCs) that evaporate as the finish dries. In all finishing products the polyurethane content has to be 'carried' in a liquid. This liquid evaporates, leaving behind the polyurethane finish film. In a solvent-based finish this means toxic solvents evaporate into the air. With Bona water-based non-toxic finishes, mostly harmless water ( $H_2O$ ) evaporates.

Water-based finishes still require small amounts of VOCs within the finish to ensure that the coating forms a smooth surface, however no Bona finishes contain any free isocyanates. Most solvent-based finishes on the Australian market have more than 500 grams per litre (g/Lt) of VOC's. By comparison Bona finishes do not exceed 90g/Lt.

Low Bona VOCs means there is no need to vacate premises during application due to fumes and no concern about the health effects of toxic chemicals. Studies show solvent-based toxic VOCs\* bring serious health risks both to the contractors applying them and the homeowners who live with them.



## **SOLVENT-BASED**



- 300-850g/Lt VOC
- Solvent-based polyurethane
- Toxic hazardous chemicals & Isocyanates
- Classified as a poison



- Toxic fumes and Isocyanates
- Asthma, Headaches, Nausea, Respiratory irritation
- Impaired fertility, Nervous System Disorders, Insomnia, Depression, Anxiety, Fatigue,
- Contaminates foodstuffs in fridge & pantry
- Requires toxic chemicals for clean-up
- Homeowners should vacate home for up to 14 days due to toxic fumes off-gassing



- Plastic unnatural appearance
- Old technology, designed for yesterday
- Yellows





## **WATER-BASED**



- 30-90g/Lt VOC
- Water-based polyurethane
- No hazardous chemicals
- No health risk



- No toxic fumes
- No health risks
- GreenGuard Gold Certified
- No effect on fresh or stored foods
- Fasy clean-up in water
- Easy clean-up in water
- No need to vacate premises, home owner can remain throughout application



- Beautiful, natural looking finish
- Hard-wearing protection proven on millions of square metres
- Non-yellowing



# A Finish for Every Type of Floor Use

The key to beautiful, hard wearing, long lasting timber floors is to select the right finishing system and to combine it with a maintenance and refurbishment program.

When choosing the floor finish, not only do the wear requirements need to be considered, but also the aesthetic needs of the room. Whilst some Bona finishes are designed to last many years in a heavy use commercial environment, often this level of protection is not needed in low use residential applications. Each Bona finish specification has a slightly different appearance and sheen range allowing you to choose a particular product to meet the aesthetic requirements of your project.

### **Bona Finishes Comparison Guide**

Residential	Heavy Residential	Commercial
Bona Mega		
Bona Mega EVO		
Bona Traffic GO		
Bona Traffic HD		
Bona Traffic HD Raw		
Bona Traffic HD Anti-slip		

The finishes comparison guide presents general advice on the selection of Bona finishes for coating. Please seek advice prior to selection to ensure the right choice to suit the application. Additional information including technical data sheets, safety information and slip resistance certificates can be found at **bona.com.au** 



#### GREENGUARD

Bona finishes are GREENGUARD indoor air quality certified, which means they are safe for use around your family and your pets. Greenguard certification is only awarded to extremely low emitting products meeting strict criteria.



#### **EMICODE® EC1**

The EMICODE® label is awarded to manufacturers after testing at recognised institutions based on scientific data. EMICODE® categorises flooring materials and building products into three emission classes. EMICODE® classes reflects very low emissions.



#### ISO 14001 SWEDAC

Bona is accredited to ISO 14001 environmental management systems by BVQI and SWEDAC, the national environmental certification body in Sweden for assessing the competence of laboratories, certification and inspection bodies.



## **Bona Primers**

## Why Primers are a Good Idea

The Bona Primer range seals the timber and protects an important build layer for top coats. A primer coat gives more control over the look and durability of the finished floor.

Bona primers should be used on bare timber prior to the application of a top coat. Primers ensure that the timber is sealed and has an even look without discolouration or patchiness. They are also designed to minimise the risk of edge-bonding, which can occur when the top coat of finish glues the floorboards together preventing the timber from shrinking or expanding naturally in response to climatic changes.

A Primer coat is fast drying and provides an important build layer for top coats, giving more control over the look and durability of the finished floor.







# Bona Classic **Bona**°



#### **Bona White**

Bona White is ideal for creating a Scandinavian style 'white' look. It gives a light whitewashed appearance and on some timber species can preserve an impression of raw, untreated timber. Bona White is most suited for use on lighter 'blonde' floors to enhance and emphasise the natural colours of the species (not recommended for high tannin or darker timbers). If you want a more solid white look simply add an extra coat. For the most natural effect combine with Traffic HD Raw, Traffic GO Matt or Extra Matt, or Mega EVO top coats.

- Whitewashed look
- Non-toxic
- Non-yellowing
- Seals the timber to give an even finish
- Reduces grain raising
- Minimises the risk of edge bonding
- TVOC 48 g/Lt
- 10-12 m<sup>2</sup>/Lt coverage
- Drying time 1-2 hours

## **Bona Classic UX**

Bona Classic UX retains the natural appearance of the timber with enhanced user experience characteristics such as easier abradability and greater filling ability. Bona Classic UX produces a light wood colouration and retains the natural appearance of the wood (not recommended for high tannin timber species). It is the ideal primer to use with Bona Traffic HD Raw. Bona Classic UX is easy to apply and quick to dry with an excellent filling ability for an even finish film.

- Retains natural appearance of the timber with great build and even colouration
- Non-toxic
- Non-vellowing
- Seals the timber to give an even finish
- Reduces grain raising
- Minimises the risk of edge bonding
- TVOC 48 g/Lt
- 8 m<sup>2</sup>/Lt coverage
- Drying time 1-2 hours

#### **Bona Classic**

Bona Classic is designed for general use but should not be used on high tannin timber species. Bona Classic is particularly suitable for softwood plank floors such as Pine and parquetry floors where greater movement is associated with both the species of timber and the construction of the floor. Bona Classic has an exceptionally low VOC content and is ideal for use where the aim is to keep the timber as light in colour as possible.

- Ideal for softwood and light coloured species
- Non-toxic
- Non-yellowing
- Seals the timber to give an even finish
- Reduces grain raising
- Minimises the risk of edge bonding
- Dries quickly, lower cost than top coats
- TVOC 24 g/Lt
- 8 m<sup>2</sup>/Lt coverage
- Drying time 1-2 hours

#### Bona Intense

Bona Intense can be used on all timbers, but is specifically recommended on timber species with high tannin content such as Blackbutt and Tallowwood. This minimises a phenomenon known as 'tannin bleed' which can cause an unsightly colour change in these types of timbers often described as a 'green' or 'mouldy' appearance. Bona Intense is also ideal for applications where a slightly deeper, richer, more golden appearance is desired to enhance the natural colour of the timber.

- Designed to reduce tannin bleed in high content species
- Non-toxic
- Non-vellowing
- Seals the timber to give an even finish
- Reduces grain raising
- Minimises the risk of edge bonding
- Dries quickly, lower cost than top coats
- TVOC 84 g/Lt
- 8 m<sup>2</sup>/Lt coverage
- Drying time 1-2 hours



# Bona Mega

## The Perfect Solution for Any Home

Bona Mega sets the standard for residential finishes. Mega is the world's biggest selling non-toxic one-component polyurethane timber floor finish. More than 250 million m<sup>2</sup> of flooring in over 90 countries have been finished with Bona Mega. In contrast to other single pack finishes that simply dry, Mega crosslinks with oxygen from the air, giving improved scratch and scuff resistance.

With excellent overall performance, Bona Mega is a great choice for timber floors in busy homes. Available in four different sheen levels: gloss, satin, matt and extra matt.

### Designed for normal and heavy residential use:

- One-component water-based top coat
- 100% polyurethane with oxygen crosslinking system
- Excellent wear resistance
- Non-yellowing
- For use with Bona primers
- TVOC 70 g/Lt (av all sheens)
- 8-10 m<sup>2</sup>/Lt coverage
- Drying time 2-3 hours between coats
- 5 mg/100 revs wear resistance (SIS 923509)
- 4 sheen levels: Gloss, Satin, Matt and Extra Matt
- Gloss Level (60°):

Satin 45% 25% Matt

Extra Matt 10%



# Bona Mega EVO

## Advancement in Every Way

Bona Mega EVO is a next generation 1K water-based finish for wood floors with a new state-of-the-art self crosslinking technology that activates when applied.

The unique, non-yellowing formula delivers faster curing with excellent resistance to scratches, wear, and chemicals.

With VOC levels below 3%, the finish contributes to healthier working conditions with a lower impact on indoor air quality.

#### Designed for heavy domestic and medium commercial use:

- One-component water-based polyurethane/acrylate
- Ready to apply no mixing required
- Crosslinking technology activates when applied
- Excellent wear resistance
- Non-toxic, low odour
- Non-yellowing and unaffected by UV light
- No waste pot life not applicable
- For use with Bona primers
- Max 3% VOC
- 8-10 m<sup>2</sup>/ Lt coverage
- Drying time 1-2 hours between coats
- 3 sheen levels: Satin, Matt and Extra Matt
- Gloss Level (60°):

Silk Matt 40%

Matt 18%

Extra Matt 9%



**Bona**® Recommended by professionals since 1919

bona.com.au

# Bona Traffic GO

## Next Generation Heavy Wear Coating

Bona Traffic GO combines simplicity and efficiency with the durability and performance of a true two-component product. Designed for heavy wear areas with the benefits and ease of a one-component finish.

Application is a smooth process - just shake and GO with a built-in hardener that's only activated when the finish is applied. This allows for quick application and more flexibility in the work process as it's no longer required to calculate and mix hardener with finish. This eliminates the risk of something going wrong in the mixing process and completely eliminates wastage. Traffic GO gives you a simpler and safer way to achieve heavy wear durability. In normal circumstances floors can be put back into full use 24 hours after being completed.

With an isocyanate free formula, Traffic GO meets the safety and health regulations of tomorrow.

#### Designed for heavy traffic residential and commercial use:

- One-component water-based top coat (with two-component performance)
- 100% polyurethane
- Ready to apply
- Built-in hardener activated when applied
- Excellent wear resistance
- Non-toxic
- Non-yellowing
- No waste no pot life
- For use with Bona primers
- Max 3% VOC
- 8-10 m<sup>2</sup>/ Lt coverage
- Drying time 2-3 hours between coats
- 3 sheen levels: Silk Matt, Matt, Extra Matt
- Gloss Level (60°):

Silk Matt 45%

Matt 20%

Extra Matt 10%



# Bona Traffic HD

## For High Wear Resistance and Minimal Downtime

Ideal for commercial use in areas where downtime is limited and high wear resistance is a must. Bona Traffic HD (Heavy Duty) is a two-component finish available in two sheen levels: satin and extra matt. Bona Traffic HD is designed to be used in commercial situations where the level of traffic and the use of the floor is at its most extreme.

Bona Traffic HD has all of the features and benefits of Bona Traffic, but has been specially formulated for added durability and wear resistance together with a much quicker curing time. Under reasonable conditions, commercial floors can be put back into full use 24 hours after being completed.

Bona Traffic HD is the perfect choice for floors where extreme levels of traffic are expected such as retail shops, halls, museums, galleries and other public places.

#### Designed for extreme commercial use:

- Two-component water-based top coat
- 100% polyurethane
- Extreme wear resistance
- Low-odour
- Non-toxic
- Non-yellowing and unaffected by UV light
- Suitable for over-coating pre-finished floors
- For use with Bona primers
- TVOC 50 g/Lt (all sheens)
- 8-10 m<sup>2</sup>/Lt coverage
- Drying time 2-3 hours between coats
- 1.5 mg/100 rev wear resistance (SIS 923509)
- 2 sheen levels: Satin and Extra Matt
- Gloss Level (60°):

Satin 45%

Extra Matt 10%



**Bona** Recommended by professionals since 1919

# Bona Traffic HD Raw

## Ultra Matt Floors with Haptic Feel and Great Durability

Bona Traffic HD Raw brings a uniquely true wood experience into the world of finished floors. Offering an ultra matt floor surface with a high level of protection, Bona Traffic HD Raw creates a soft haptic feeling of untreated wood, delivering an astonishing tactile sensation.

Haptics is the science of touch. Bona has incorporated haptic technology to achieve a finish that looks and feels like raw, natural timber - but with the protection of a finish. Bona Traffic Raw HD is also special because regardless of which angle you view the floor, the sheen remains ultra matt even in reflective light.

A pleasure to walk on with excellent slip safety, Bona Traffic HD Raw is great for homes with children and pets as well as commercial floor surfaces. Bona Traffic HD Raw creates ultra matt floors with great durability - the raw experience of wood, protected. A premium product for a premium look.

#### Designed for a raw look & feel for residential and commercial use:

- Two-component water-based top coat
- Ultra matt haptic feel
- Low odour, non-toxic
- P3 Slip-resistance AS 4586:2013
- Excellent wear resistance
- 100% polyurethane
- Non-yellowing and unaffected by UV light
- Suitable for over-coating pre-finished floors
- TVOC max 52 g/Lt (incl hardener)
- 8-10 m<sup>2</sup>/Lt coverage
- Drying time 2-4 hours between coats
- Light use after 24hrs
- Sheen Level (60°/85°):

Ultra Matt 4%



**Bona** Recommended by professionals since 1919 bona.com.au

# Bona Traffic HD Anti-slip

## Walk Safe with Traffic HD Anti-slip

Bona Traffic HD (Heavy Duty) Anti-slip has been designed to give the benefits of Bona Traffic HD together with improved slip-resistance performance.

Bona Traffic HD Anti-slip is uniquely formulated with inert non-reactive slip-resistance particles, removing the need to add powder additives on site to achieve slip-resistance. Traffic HD Anti-slip surpasses the P3 rating required for floors and staircases in commercial and domestic buildings. At the same time, HD Anti-slip gives excellent wear, scuff and scratch resistance together with a smooth-to-touch surface.

Traffic HD Anti-slip does not require the addition of any slip-resistance additives. Contractors simply apply the finish in the same way as Bona Traffic HD. Specifiers can be confident that every litre of finish applied to the floor will have exactly the same level of slip-resistance.


Specifiers should choose a P rated product, as detailed in AS 4586:2013, as these products may be tested on site, using the Pendulum test noted in Appendix A. This is becoming more common, particularly with local authorities, to verify the slip-resistance performance of a floor surface. With Bona Traffic HD Anti-slip, the inclusion of the slip-resistant particles during production and the safety of having a rating in excess of P3 means that testing on-site can be confidently undertaken.

Traffic HD Anti-slip is ideal for applications where safety and anti-slip qualities are paramount such as staircases, aged care, facilities, entry foyers and reception areas, food courts, cafés and restaurants, public halls, hospitals, medical centres and other public places.

#### **Designed for commercial Anti-slip applications:**

- Two-component water-based top coat
- Non-toxic
- Non-yellowing
- Pre-mixed no need for the on-site addition of slip-resistance additives
- High durability and extreme scratch resistance
- Extremely quick hardness development (possible to use floor in full use following day)
- Low odour
- DIBt approved for low indoor emissions
- P4 Slip-resistance AS 4586:2013
- For use with Bona primers
- TVOC 50 g/Lt
- 8-10 m<sup>2</sup>/Lt coverage
- Drying time 2-3 hours between coats
- Available only in Matt
- Gloss Level (60°):

Matt 15%

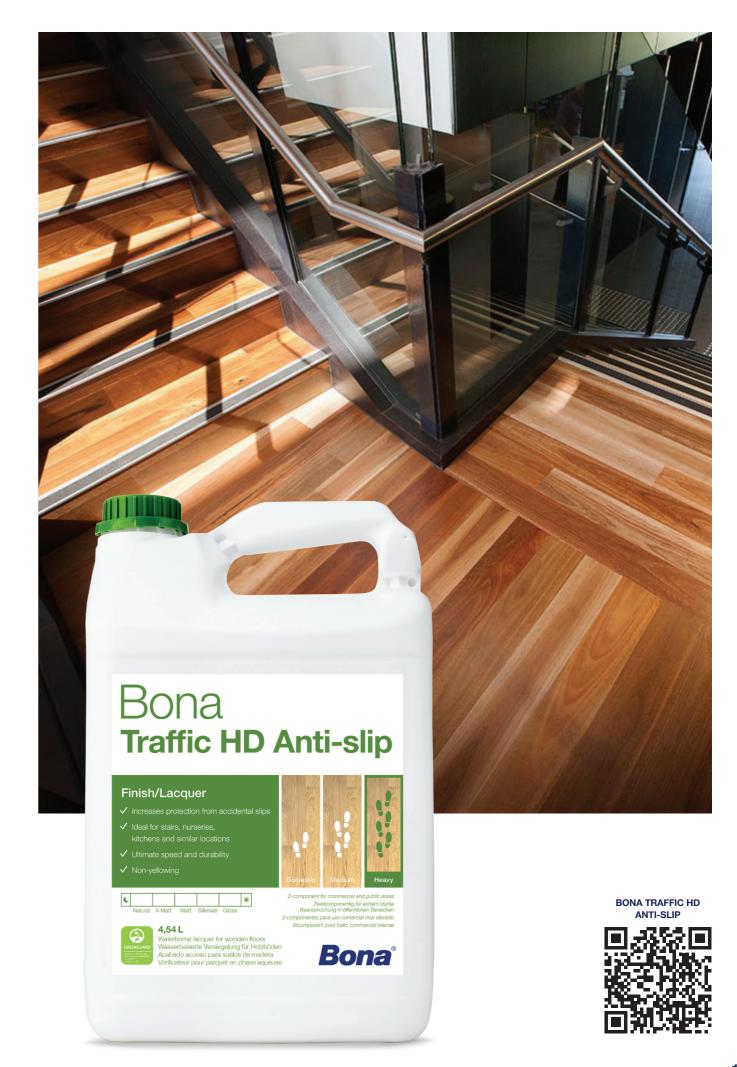

## Bona Craft Oil 2K

## Two-component Natural Penetrating Oil





Available in 1.25 Lt can

Bona Craft Oil 2K colours and seals in one step, eliminating the need for a primer. It is easy to apply and penetrates deep into the timber to resist water and stains. It can be used on its own as a guick drying, high-performance oil, or combined with Bona Traffic finishes for complete protection.

The unique formula is made from modified plant-based oils and has a very low solvent content. Bona Craft Oil 2K is catalysed with a hardener for greater durability and is compatible with most timber species.

Bona Craft Oil 2K is available in 12 colours including neutral and is suitable for timber floors, as well as furniture and other woodwork.

Available in 12 colours (including Neutral) which can be inter-mixed to create the exact shade desired



- Colours and seals in one step
- Low VOC / Vegetable oil based
- Overcoat with Bona Traffic or Traffic HD for extra protection
- Very low solvent content less than 25g/Lt
- Uniquely long open time and pot life
- Extremely high degree of penetration
- Fast drying time: Neutral 8 hrs Coloured 12 hrs (under normal indoor conditions 20°C / 60% RH)
- Approx. 30 m<sup>2</sup>/Lt coverage depending on timber type
- Apply with a short-haired roller or red pad
- Gloss level (60°): 2%



# Bona Hard Wax Oil

## Natural Oil, Modified for Protection of Timber Floors





Available in 2.5 Lt can

Bona Hard Wax Oil delivers excellent resistance to wear, scuff marks and moisture. It produces the warm look of an oiled floor while establishing a stain resistant surface that is spot-repairable and easy to maintain.

On timber species where high levels of natural oils are present Bona Craft Oil 2K can be used as a primer prior to applying Hard Wax Oil. Craft Oil 2K can be used to colour the floor before applying Hard Wax Oil.

Bona Hard Wax Oil is a Canola based natural oil, low in odour and free from hazardous agents. It is easy to handle and applicable with a roller or brush. It leaves an open, breathing surface that reduces the risk of edge-bonding. Highly suitable for floors with underfloor heating.

- Tough and dirt resistant
- Low VOC vegetable oil and wax based
- Excellent water resistance
- Rapid drying, fast working process
- High coverage rate; 20 24 m<sup>2</sup>/Lt
- Free from hazardous agents
- Apply with short-haired roller or brush
- Drying time 6 8 hrs between coats
- 2 Sheen Levels: Satin and Matt
- Gloss Level (60°):

25% Satin

Matt 10%

2 Layers Provide Optimum Results Bona Hard Wax Oil

# Bona Decking Oil

## Long Lasting Protection for Outdoor Decks





Available in 2.5 Lt can, Neutral only

Rapid drying and easy to apply, Bona Decking Oil is a modified vegetable based oil for superior impregnation and long-lasting protection of timber decking and other exterior wood surfaces. It enhances the natural wood grain while protecting against moisture ingress.

The formula contains a very low amount of solvents. Applied in 1-2 even thin coats, the surface is then buffed lightly to remove excess product and enhance the protection properties.

- Low VOC vegetable oil based approx 6%
- Contains UV protection
- Reduces wood cracking and warping
- Colour: Neutral
- Easy to apply
- Fast drying: 30 60 mins between coats (Light use: 24 hrs)
- Apply 1-2 coats, no need for dilution
- Approx 20 m²/Lt coverage depending on wood type
- Apply with wide brush / roller
- Remove excess after application with a rotary sander fitted with an oil cloth to prevent pooling
- Gloss Level (60°): 2-4%









# Bona Deck Guard

Fast, Convenient Protection for Outdoor Decks



Available in 3.8 Lt tub



Bona Deck Guard is a fast and convenient solution which keeps an outdoor timber deck in great condition and looking like new in any climate.

Bona Deck Guard is an easy to use water-based coating for outdoor wood and composite wood structures.

Simply clean to remove contaminants from the surface, then apply 1-2 coats of Bona Deck Guard with an applicator or brush. Clean up afterwards with water.

- Water-based, low VOC
- UV protection
- Colours: Neutral & Medium Brown
- Easy to apply, low odour
- Suitable for solid wood or composite
- Fast drying: 3-4 hours between coats (Light use: 24 hrs)
- Apply 1-2 coats, no need for dilution
- Approx. 6-12 m<sup>2</sup>/Lt coverage depending on wood type
- Apply with applicator or brush, clean up with water





Medium Brown





**Bona** Recommended by professionals since 1919

# Bona DriFast Stains



BONA

## The Easy Way to Colour Your Floor

Bona DriFast Stain is based on a modified oil system which offers big advantages over traditional solvent-based stains. Using a 'traditional' system, it is difficult to prevent overlaps and variation in colour as the stain penetrates immediately into the timber. Bona DriFast Stain avoids these problems with an open time of 3 minutes or longer depending upon the timber and site conditions. This allows blending of the colour from section to section across the floor.

Bona DriFast Stain has earned a great reputation for being easy to use, fast drying and avoiding lapmarks. Available in 15 inter-mixable colours, Bona DriFast Stain gives an infinite colour palette. You can mix any number of colours together to create the exact shade you desire.

DriFast Stain can be applied with a traditional wipe on wipe off method or by using a slow speed buffing machine. Bona DriFast Stain is compatible with all Bona finishes and most colours can be over-coated just 2 hours\* after application in reasonable conditions.

#### Easy to use and apply:

- 2 hour dry time for most colours\*
- 20–40 m²/Lt coverage
- Compatible for all Bona finishes
- No bleed-back
- Easy to apply by using a slow speed buffing machine or traditional wipe on/ wipe off method



\*Most colours will dry in 2 hours at 20-25°C. Allow up to 6 hours for White & 18 hours for Ebony, Spice Brown and Cocoa or mixes containing these colours. Please refer to the additional information available for Bona DriFast Stain at bona.com.au

### Bona DriFast Stains Colour Chart















Grey











Red Mahogany







15 standard colours

- Blend colours for an unlimited palette
- Direct stain system creates richer colours

## Floor Care

## A Complete System to Maintain and Extend the Lifespan of Any Floor

The care of flooring surfaces is often overlooked or poorly implemented. To extend the life of any floor, proper cleaning and a preventative maintenance program is required. As the world's leading manufacturer of water-based floor coatings and a major supplier of finishes for prefinished engineered timber flooring, Bona offers an extensive range of floor care products. The range includes cleaning and refresher products, microfibre dust mops and cleaning mops with integrated spray application as well as a pet system. Our floor care products are easy to use and easy to find, being stocked in over 550 retail outlets across Australia.

### **Bona Premium Spray Mop**

Ergonomic and simple to use, the Spray Mop has an integrated 850ml cartridge and trigger spray function. Forget filling up a bucket, just spray and clean in one sweep. The cleaner cartridge can be refilled from the handy 2.5 Lt refill pack or replaced with any of the Bona cleaning cartridge range.

- For timber or hard surface floors
- Specially developed to clean and maintain floor surfaces
- Streak free cleaning makes floors look pristine
- Swivel mop head for ultimate reach in difficult areas



## Floor Cleaners

- Available for Timber or Hard Surface floors
- Fast drying, ready to use formula
- No streaks, no dulling residue left behind
- Comes in 2.5 Lt Refill, 1 Lt Spray Pack, 850 ml Mop Refil
- Bona Pet System for eliminating pet messes and odours.



## MicroFibre Mop Pads

- Clean and maintain your Timber, or Hard Surface floors
- Remove 99% of bacteria
- Designed for Bona Spray Mops
- **Dusting Pad**
- Cleaning Pads
- Applicator Pad



Bona

Bona

For Timber or Hard Surface floors

bona.com.au

BONA

- Ready to use, water-based maintenance coating
- Maintain & revive your floors
- Protection against wear



# Bona is the Market Leader All Around The World

With the experience and expertise that comes from being an international market leader, Bona supplies non-toxic water-based timber floor finishes to over 90 countries around the world. In Australia alone, Bona finishes have been used to cover more than 16 million square metres of flooring and more than 1 billion worldwide.




National Gallery of Australia, ACT Bona Traffic HD satin on the vast and expansive 2,000m² floor space of the National Gallery, rivaling the masterpieces on display at Australia's premier gallery.



Residential Home, NSW
Bona Intense and Bona Traffic HD used on solid European Oak, creating a low sheen natural look that perfectly offsets the modern interior of the home.



Residential Home, VIC
This project involved laying new flooring into a very modern home as part of an extensive renovation. The new extension covered about 100m² of living and kitchen area, with Bona Traffic GO being used throughout.



Parliament House, ACT
Kings Hall is an original part of
Old Parliament House. The Jarrah and
Silver Ash flooring was refinished with
Bona Traffic HD protecting the heritage
floor against the 350,000 visitors each year.




Residential Home, Queensland
This architect designed two storey luxury
home features 140mm x 15mm Blackbutt
hardwood flooring, finished with Bona
Traffic Matt.



Pearl Beach Home, NSW
A highly detailed project with one coat
Bona Craft Oil 2K Invisible applied,
followed by three top coats of Bona
Traffic HD Extra Matt, with Bona Traffic
HD AntiSlip on the treads.







#### State Library Victoria, VIC

Bona Traffic was used to protect 8,800m² of flooring at treasured icon the State Library of Victoria. Bona Traffic HD Anti Slip was used for stair cases and Bona DriFast Ebony Stain used for the feature hallway. The project which took over 2 years consisted of around 5,500m² of new floors and approximately 3,000m² refurbished existing floors. Tasmanian Oak was specified for the new flooring, whilst a combination of hardwoods including Jarrah & Blackwood were used in the existing floors. These beautiful floors will continue to make the Library a hub for the creation of knowledge for generations to come, as libraries should.

To view project galleries visit: bona.com.au/project-gallery

